

# Grease metering valve

MG2 · MG2C


Positive displacement injectors for use with metal or nylon tail tubing.



[MG2 · MG2C]

## Specifications

Operating pressure	2.5MPa
Reset pressure	1.4MPa




\*Grease valve have grooving as shown in the picture.


## Model

Model	Part Number	Discharge volume (mℓ)	L (mm)	Mark
MG2-3	205741	0.03	48	3 HEX12
MG2-5	205742	0.05		5
MG2-10	205743	0.1		10
MG2-20	205744	0.2	64	20
MG2-30	205745	0.3		30
MG2-50	205746	0.5		50
MG2C-3	205731	0.03	53.5	3
MG2C-5	205732	0.05		5
MG2C-10	205733	0.1		10
MG2C-20	205734	0.2	69.5	20
MG2C-30	205735	0.3		30
MG2C-50	205736	0.5		50


## Operation chart

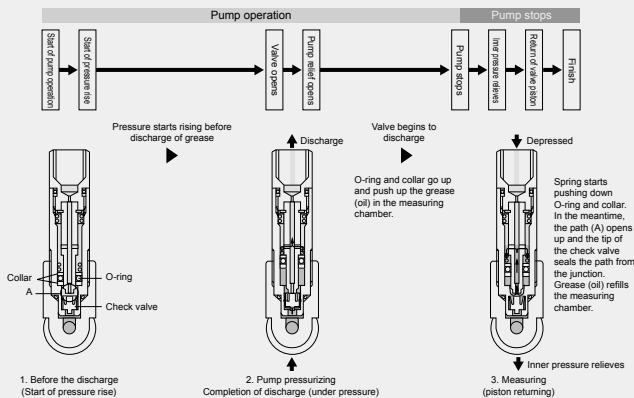

## Dimensional drawing

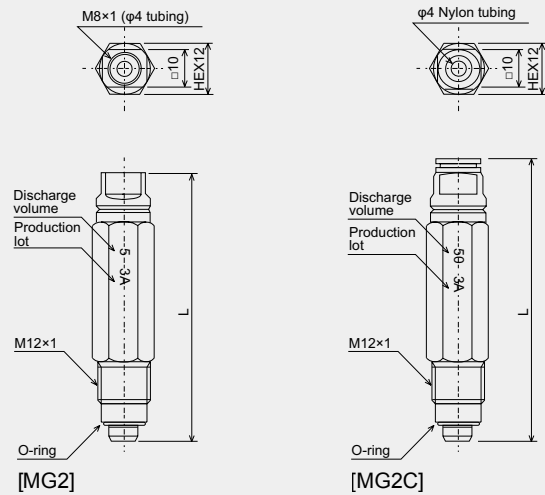

## Related parts

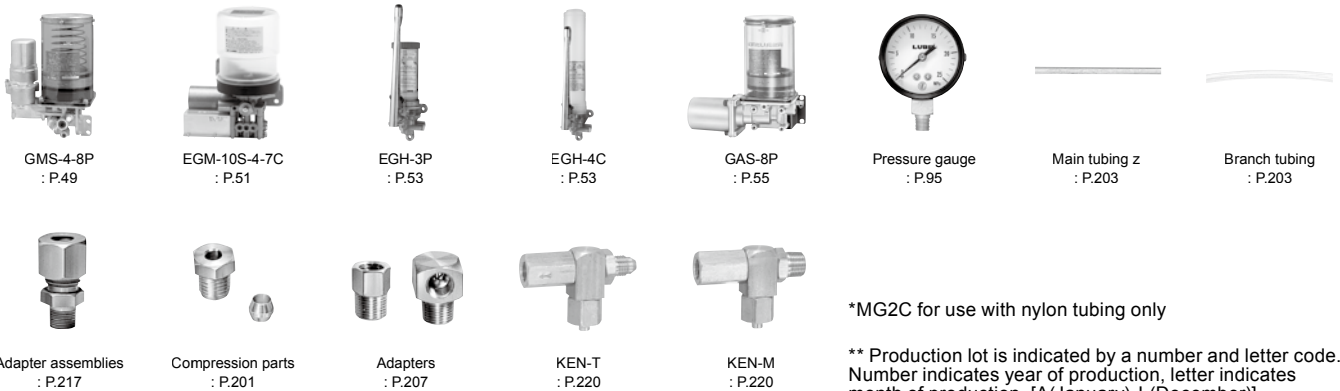

\*MG2C for use with nylon tubing only

\*\* Production lot is indicated by a number and letter code. Number indicates year of production, letter indicates month of production. [A(January)-L(December)]